

Android Controlled Solar Powered Pesticide Automated Sprayer For Agriculture

Ghule Akshay¹, Nawale Vaibhav², Ghule Rutik³, Phatangare Pravin⁴, B.N.Bansode⁵

^{1,2,3,4} UG Student, Department of Electronics and Computer Engineering, Amrutvahini College of Engineering, Sangamner, 422608. Maharashtra, India

⁵ Professor, Department of Electronics and Computer Engineering, Amrutvahini College of Engineering, Sangamner, 422608. Maharashtra, India

How to cite this paper:

Ghule Akshay¹, Nawale Vaibhav², Ghule Rutik³, Phatangare Pravin⁴, B.N.Bansode⁵, "Android Controlled Solar Powered Pesticide Automated Sprayer For Agriculture", IJIRE-V4I03-417-420.

Copyright © 2023 by author(s) and 5th Dimension Research Publication. This work is licensed under the Creative Commons Attribution International License (CC BY 4.0).
<http://creativecommons.org/licenses/by/4.0/>

Abstract: Manual spraying of pesticides and herbicides to crops and weed inhibitors onto the field are quite laborious work to humans. Manual trimming of selected unwanted plants or harvested crops from the field is also difficult. Our project proposes a multipurpose solar powered, flexible, Remote Controlled, semi-automated spraying robot with 4 Degrees of Freedom (DOF) in spatial movement, with additional plant moving equipment. The robot is designed to spray pesticide/insecticide directly onto individual lesions minimizing wastage or excess chemical spraying, hence making the system cost effective and also environment friendly. It is designed to cut down undesired plants selectively by remotely controlling the start and stop of the moving system. Alternatively, it also serves the purpose of maintaining lawns and sports field made of grass. The same system can be used for water spraying and mowing the grass to desired levels, leading to proper maintenance of the field. The robot is designed to move at 1.4m/s, with an effective spraying area of 0.98 sq. m. by the nozzle and an effective cutting area of 0.3 sq. m. by the mower, when stationary. The prototype has a battery back-up of 7.2hrs under minimum load conditions

Key Words: Solar Panel, Sprayer, Grass Cutter, Wheel Control

I.INTRODUCTION


Agricultural sector is changing the socio-economic environment of the population due to liberalization and globalization. About 75% people are living in the rural area and are still dependent on agriculture. Agriculture has been the backbone of the Indian economy. Spraying of pesticides is an important task in agriculture for protecting the crops from insects. Farmers mainly use hand operated or fuel operated spray pump for this task. This conventional sprayer causes user fatigue due to excessive bulky and heavy construction. This motivated us to design and fabricate a model that is basically trolley based solar powered Grass Cutter, Pesticide Sprayer & Lighting System in a single unit. Due to use of Solar energy for operating pump & grass cutter, there will be elimination of engine of fuel operated spray pump & cutter by which there will be reduction in vibrations and noise. India is agrarian economies and most of rural populations depend on agriculture to earn their livelihood. The farming methods at present are manual or semi-automatic with high involvement of labourers. In the recent years, the number of labour availability is reducing continuously along with increase in their wages. There is a requirement of higher productivity. Hence the device is to be designed which helps farmers to overcome the stated problem. Automated Robots can provide us the solution

II. LITERATURE REVIEW

This paper presents an engineering solution to the current human health hazards involved in spraying potentially toxic chemicals in the contained space of a hot and steamy glasshouse. ARM- Based Pesticide Spraying Robot. The main use of robots in agriculture is for harvesting ,Fruit picking , driverless tractor or sprayer are design to supersede human labor. Main aim is to avoid manual spraying of pesticides at actual farm

1. Camargo, J.S. Smith. (2009). An image-processing based algorithm to automatically identify plant disease visual symptoms. elsevier journal of computer and electronics in agriculture.
2. Joaquin Gutierrez, Juan Francisco, Villa-Medina, Alejandra Nieto- Garibay, and Miguel Angel Porta-Gandara. (2014). Automated Irrigation System Using a Wireless Sensor Network and GPRS Module. IEEE Transactions On Instrumentation And Measurement, Vol.
3. Mohamed Rawidean Mohd Kassim, Ibrahim Mat, Ahmad Nizar Harun. Wireless Sensor Network in Precision Agriculture

III.METHODOLOGY

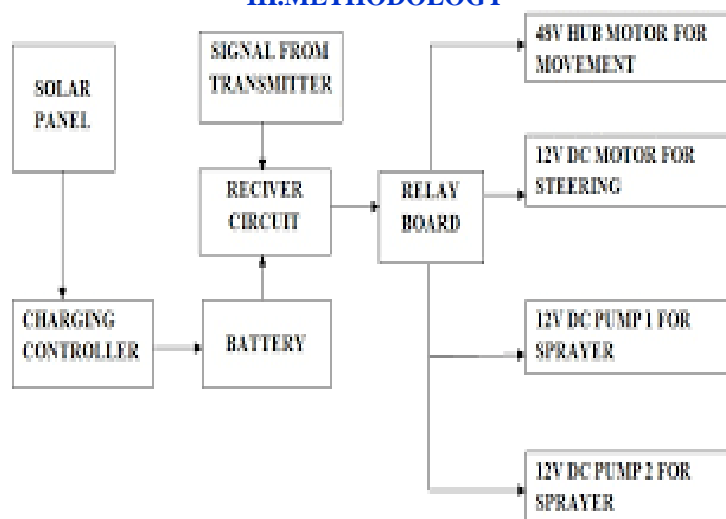

In this project the main part is the Arduino UNO R3 which control the all assembly of project. The user is with the RF control remote , the user has to select that in which mode the system has to operate either it is in manual mode and the auto mode in manual mode the user has to decide that where to move robot but in auto mode the robot will decide that where it wants to go . By using ultrasonic sensor the robot will move. The blade of the robot is hand made design the motor used for the cutter is the brush less dc motor and it has the rpm of 35000 it operates on 12v dc supply. The battery is source part for the project the battery is supplying the 12v dc for the motor and pump. The Charged on the solar plate once the battery is fully charged the robot will move properly. Also the second application is the pesticide spreading here we use the 12v dc operated pump with the 1.5m length pipe and the spreading nozzle is connected at the one end of the pipe. For supplying water to the and storing pesticide we use the water tank of 2 liter. RF control remote used here has the range of 300ft(100m). In this range the use has to give instruction to the robot. The RF uses the frequency of 434MHz and we use the encoder and decoder ic at the transmitter and receiver respectively. The ic are HT12E and HT12D. Also at transmitter the with encoder ic we use the another ic PIC181f4520 because the encoder ic is the 4 bit encoder but we require the greater than 4 bit control for that we use the PIC18f4520

1. The user can send commands to the system using android app, which are then relay to the controller over Bluetooth .
2. For spraying pesticides, fertilizers and water, DC pump can be turned on and off .The robot is moved by a pair of wheels operated by L293D motor driver.
3. Using ultra sonic sensor, obstacles can be detected in the forward and backward path of the robot movement which is used to change direction of the motor movement

The proposed robotic model provides a facility to control the movement of agriculture vehicle by the use of a SST micro controller. The micro controller is programmed using Embedded C software according to the navigation buttons provided in the android application which controls the agribot's movement. The robot is placed in the farm and is switched on through IoT and its direction is controlled by Android application.The spraying of pesticides, which can be done with the help of pesticide sprinkling pump, this can be periodically sprayed whenever the relay switch is on.The system focuses on the design, development and the fabrication of the agricultural. robot with pesticide spraying system in addition to security system using IOT.The agricultural robot is used to control the function like pesticide spraying and controlled through Bluetooth module which will communicate between android application and robot with low budget. The system is provided with dc motors for moving the robot and an intruder detection sensor, whenever the intruder is detected then a message is sendto the farmer, if the farmer's smart phone is in silent mode then a voice announcement is played about the

- a. L293D IC is used to control the DC Gear Motor.
- b. 0 0 Forward
- c. 0 1 Right
- d. 1 0 Left
- e. 1 1 Reversef. This IC Decides the movement of the motor.

5. Bluetooth Module

- a. HC-05 is 6 Pin IC
- b. Its range is 10M according to Transmitter and Receiver
- c. It uses serial communication to communicate with devices. It communicates with microcontroller using serial port (USART). event occurred at the farm. The farmer can take the photo of the intruder using IOT technology and view the farm.

2. What is Arduino UNO: Arduino UNO is a low-cost, flexible, and easy-to-use programmable open-source microcontroller board that can be integrated into a variety of electronic projects. This board can be interfaced with other Arduino boards, Arduino shields, Raspberry Pi boards and can control relays, leds, servos, and motors as an output. Arduino UNO features AVR microcontroller Atmega328, 6 analogue input pins, and 14 digital I/O pins out of which 6 are used as PWM output. This board contains a USB interface i.e. USB cable is used to connect the board with the computer and Arduino IDE (Integrated Development Environment) software is used to program the board. The unit comes with 32KB flash memory that is used to store the number of instructions while the SRAM is 2KB and EEPROM is 1KB. The operating voltage of the unit is 5V which projects the microcontroller on the board and its associated circuitry operates at 5V while the input voltage ranges between 6V to 20V and the recommended input voltage ranges from 7V to 12V. L293D DRIVER motor driver acts as an interface between the motors and the control circuits. Motor requires high amount of current whereas the controller circuit works on low current signals. So, the function of motor drivers is to take a low-current control signal and then turn it into a higher-current signal that can drive a motor

E. Hardware Used

Solar Panel: Solar panels are those devices which are used to absorb the sun's rays and convert them into electricity or heat

2. Servo Motor: A servomotor is a rotary actuator or linear actuator that allows for precise control of angular or linear position, velocity and acceleration. It consists of a suitable motor coupled to a sensor for position feedback

3. Dc Gear Motor: A gear motor is an all-in-one combination of a motor and gearbox. The addition of a gear head to a motor reduces the speed while increasing the torque output. The most important parameters in regards to gear motors are speed (rpm), torque (lb-in) and efficiency (%). In order to select the most suitable gear motor for your application you must first compute the load, speed and torque requirements for your application. ISL Products offers a variety of Spur Gear Motors, Planetary Gear Motors and Worm Gear Motors to meet all application requirements. Most of our DC motors can be complemented with one of our unique gearheads, providing you with a highly efficient gear motor solution

4. Dc Gear Motor Driver Circuit

IV. RESULT & DISCUSSION

The spraying time of insecticides is depending on the quantity of pesticide to be sprayed. For example, for a thousand ml of insecticides, spraying time is around five mins. If we want to grow the amount of pesticide to be sprayed, the burden lifting capability of the quadcopter must be elevated. This is achieved through deciding on the higher specification of BLDC i.e. Greater than one thousand rpm/kV. The flight time of the quadcopter is near approximately eight minutes. To boom the flight time we need to choose better specification for Lippo battery.

The height of spraying is 6-7 toes. The place protected is 10 x 10 toes. The biggest gain of the drone is that it's miles customizable according to the requirement. The drone may also be useful to spray now not best fertilizers and pesticides however also can be used to spray paints, display fields with the help of Wi-Fi digital camera too.

V. FUTURE SCOPE

Innovation is consistently developing and there is dependably scope for development and headways in each field of work. In future execution this framework should be possible that can give sign after culmination of pesticide. The utilization of GSM model to send message when pesticide is done should likewise be possible in future. There is no much support cost and no working expense as it is utilizing sunlight based vitality it is free of expense and there is no contamination its working key is extremely basic and that it is practical to the agriculturists it is increasingly profitable that it tends to be utilized for both for showering and well as water system.

VI. APPLICATION

1. Agricultural fields
2. Weed control
3. Utility platforms
4. Industrial applications
5. Hazardous applications
6. Hospital and safety applications..

VII. CONCLUSION

Internet of Things' is far and wide castoff in relating devices and gathering statistics. This agriculture monitoring system serves as a reliable and efficient system and corrective action can be taken. Wireless monitoring of field reduces the human power and it also allow sesteriii identify intruders causing trouble in the field. It is cheaper in cost and consumes less power. The smart agriculture system has been designed and synthesized. The developed system is more efficient and beneficial for farmers. It gives the information about the intruders in agricultural field through an alert message to the farmer, if the android phone is silent or is in vibrate mode, a voice alert message is sent announcing the nuisance caused in the field to the farmer. The system can be used in the current scenario of covid-19 to sprinkle sanitizing chemicals over the city without manual intervention. The application of such system in the field can definitely help to protect crops from intruders. In this project, IOT controlled robot, named, AgriBot has been designed, built and demonstrated to carry out spraying pesticides in an agriculture field. The agriBot will assist the farmers in increasing crop yielded and protect them from harmful chemicals of pesticides with security alert

References

- [1] Laukik P. Raut, Smit B. Jaiswal, Nitin Y. Mohite. (2013, Nov.) "Design, development and fabrication of agricultural pesticides sprayer with weeder", *International Journal of Applied Research and studies*, pp. 1-8.
- [2] Prashant M. Chavan, Gayatri P. Chavan, "Interfacing of Wind Energy to Grid using Static Compensator and Load Reactive Power Compensation", *Information Communication Engineering and Technology (ICICET) 2018 International Conference on*, pp. 1-4, 2018
- [3] P. M. Chavan, Girish R. Walake, "Interfacing of Renewable Energy Source to Grid Using STATCOM to Improve the Power Quality", *international Journal of Engineering Technology Management and Applied Sciences*, vol. 3, no. 3, pp. 2349-4476, March 2015.
- [4] Prashant M. Chavan, Girish R. Walke, "Using STATCOM interfacing of renewable energy source to grid and power quality improvement", *2015 International Conference on Energy Systems and Applications*, 30 Oct.-1 Nov. 2015, Pune, India.
- [5] Prashant M. Chavan, Gayatri P. Chavan, "Interfacing of hybrid power system to grid using STATCOM & power quality improvement", *Information, Communication, Instrumentation and Control (ICICIC), 2017 International Conference*, 17-19 Aug. 2017, Indore, India.