



# Internet of Things for Environmental Monitoring

R. HARIPRASANTH<sup>1</sup>, M. DEVA PRASANTH<sup>2</sup>

<sup>1,2</sup>II-Year Mechatronics Engineering, SNS College of Technology, Tamil Nadu, India

## How to cite this paper:

R. HARIPRASANTH<sup>1</sup>, M. DEVA PRASANTH<sup>2</sup>,  
"Internet of Things for Environmental Monitoring",  
IJIREE-V3I02-91-96.

Copyright © 2022 by author(s) and  
5<sup>th</sup> Dimension Research Publication.

This work is licensed under the Creative Commons  
Attribution International License (CC BY 4.0).  
<http://creativecommons.org/licenses/by/4.0/>

**Abstract:** Increasing population in cities demands the adequate provision of services and infrastructure for the city's residents and visitors. The deployment of information and communication technologies to accomplish this objective presents an opportunity for the progress of towns, where the management of the city and citizens are given access to real-time information about the environment. This paper presents the structure for environmental monitoring using the Internet of Things (IoT). The network comprises the complete information system from the sensor level to data management and cloud-based information about the environment. This IoT vision is applied to temperate, waste management, and vehicle parking to demonstrate a method for existing systems that can be adopted for the enhancement and delivery of services.

**Keywords** Internet of Things (IoT), Temperature, waste management, vehicle parking, MQTT.

## I. INTRODUCTION

The Internet of things (IoT) is a network of objects, in which the objects of everyday life are embedded microcontrollers, sensors, and software that enables these objects to collect and communicate data with one another and the users, forming the essential part of the internet. The IoT model aims at making the Internet even more persistent. Furthermore, by enabling easy access and communication with a wide range of devices such as, for example, home appliances, surveillance cameras, monitoring sensors, and so on, the IoT is implemented for the development of applications that makes use of the enormous amount and the data generated by such objects provide services. This method finds application in many different areas, such as home automation mobile healthcare, traffic management, and many others [1]. In this scenario, the application of the IoT paradigm to a city environment is of particular interest, as it responds to the governments to adopt information and communications technologies (ICT) solutions in the management of public affairs, thus it is called the smart City concept [2]. Though there is no yet formal and widely accepted definition of —Smart City, the aim is to make better use of the municipal resources, increasing the quality of the services presented to the residents, while decreasing the operational costs of the municipal administrations. This objective can be achieved by the deployment of an IoT, i.e., a communication infrastructure that provides cohesive, simple, and inexpensive access to an overabundance of public services, thus unleashing potential interactions and increasing clearness to the citizens. An IoT has numerous benefits in managing and optimizing traditional services, such as transport and parking, lighting, observation and maintenance of public areas, protection of cultural heritage, garbage collection, hospitals, and school. Furthermore, the accessibility of different types of data, which is collected by a persistent IoT, may also be used to take advantage to increase the clearness and promote the actions of the local government toward the residents, improve the awareness of people about the status of their town, stimulate the active participation of the residents in the management of public administration, and also stimulate the building of new services provided by the IoT [3]. Therefore, the presentation of the IoT standard to the City is particularly to regional and regional administrations that may become the early implementation of such technologies, thus acting as catalyzes for the implementation of the IoT paradigm on a wider scale. The paper is organized as follows: Proposed system, especially from the perspective of the environment is first given in Section II. We then present the details of the IoT implementation for environmental monitoring in Section III and the results for the proposed system in Section IV. We also present the summary and future thoughts in section V and section VI respectively.

## II. PROPOSED SYSTEM

IoT has various applications in this paper we are discussing temperature, vehicle parking, and waste management. These are the few issues that we are facing regularly in our day-to-day life with the use of IoT we can provide solutions to these problems.

### A. Temperature

The IoT plays a great role in the development of future smart cities. For instance, Air Quality Eggs can be found across America, Western Europe, and East Asia, and may finally play a role in developing countries with the most rapid urban population growth and peak rates of pollution. This is a community-led air quality sensing network that allows anyone to collect very high contents of Nitrogen-di-oxide (NO<sub>2</sub>) and Carbon monoxide (CO) concentrations in their surroundings. These two gases are the most suggestive elements related to urban air pollution that are sense-able by reasonably priced,

DIY sensors. The temperature plays a very crucial role. The temperature varies from time to time. The temperature during the day times is completely different at night. In paper gives an idea of how a temperature can be identified for the city using the IoT concept.

### **B. Waste Management**

Waste management is the main issue in many growing cities, due to both the cost of the service and the problem of the storage of garbage accumulation. Deeper penetration of information and communications technologies solutions in this field may result in savings and inexpensive environmental advantages. For instance, the use of intelligent waste containers, which identify the level of load and allow for an optimization of the collector trucks route, can reduce the cost of waste collection and improve the quality of recycling [4]. To realize such a smart waste management service, the IoT will connect the devices, i.e., intelligent waste containers, to a control center optimization software to process the data and determines the optimal management of the collector truck.

### **C. Vehicle Tracking**

The vehicle tracking facility is based on road sensors and intelligent displays that direct drivers along the ZANELLA et al.: INTERNET OF THINGS FOR SMART CITIES 25 best paths for parking in the city [5]. The benefits deriving from this service are various: faster time to locate a parking slot means fewer CO emissions from the car, lesser traffic congestion, and happier citizens. The vehicle parking facility can be directly integrated into the IoT infrastructure. Furthermore, by using communication technologies, such as Radio Frequency Identifiers (RFID) or Near Field Communication (NFC), it is possible to understand an electronic confirmation system of parking permits in slots reserved for residents or the disabled, thus offering a better service to residents that can legitimately use those slots and an efficient tool to quickly spot violations.

## **III. IMPLEMENTATION**

IoT service provides a simple but powerful capability to interconnect different kinds of devices and applications all over the world. IoT service acts as an MQTT broker and is thus responsible for distributing messages to connected clients. Devices and applications communicate with the MQTT broker using the MQTT protocol.

### **A. Temperature Architecture**

This paper discusses the temperature variations in and around the place using the data received from the satellite. There are three entities defined in our system that is cloud devices and apps as shown in Fig.1.

**Cloud:** Cloud becomes prevalent, an increasing amount of data is being stored in the cloud and shared by the devices with specific privileges, which defines the access rites of the stored data. The user gets an API Key, the password, and the device purpose for which it is registered. Once he is registered to the cloud. Using these API keys and the password he could access the data received from the devices.

**Devices:** Devices can act as sensors for the purpose of receiving or transmitting the data to the cloud. The devices can be anything that can sense the data.

**Apps:** Applications are programs that consume the information received from those devices.

**MQTT:** Message Queue Telemetry Transport/Things transport. In IoT, things are nothing but the devices like Buildings, systems, etc. Telemetry is an automatic device that is used to measure and transmit data. It can be considered as the secret behind the IoT service. MQTT is a simple lightweight, publish/subscribe messaging protocol on top of TCP/IP protocol

**JSON:** JavaScript Object Notation. It acts as a bridge between the physical objects and the web sensors.

### **A. Waste Management and Vehicle Tracking**

This paper also discusses waste management and vehicle tracking using the data received from the satellite. There are three entities defined in our system that is cloud devices and apps as shown in Fig.2.

**Cloud:** Amount of data is being stored in the cloud and shared by the devices with specific privileges, which defines the access rites of the stored data. The user gets an API Key, the password and the device purpose for which it is registered.

Once he is registered to the cloud. Using these API keys and the password he could access the data received from the devices.

**Devices:** Since now a day most devices are GPS enabled, it is very easy to track the exact locations of the vehicles. In our day-to-day life, we do not know the exact time when the waste truck arrives to collect the garbage from every particular area. The details of the waste truck and the vehicle to be tracked are based on the latitude and longitude of the particular region.

**Apps:** Programs that receive data from the devices.

As in the below description the app is used to access the data from the cloud.

**REGISTER GENERATE**

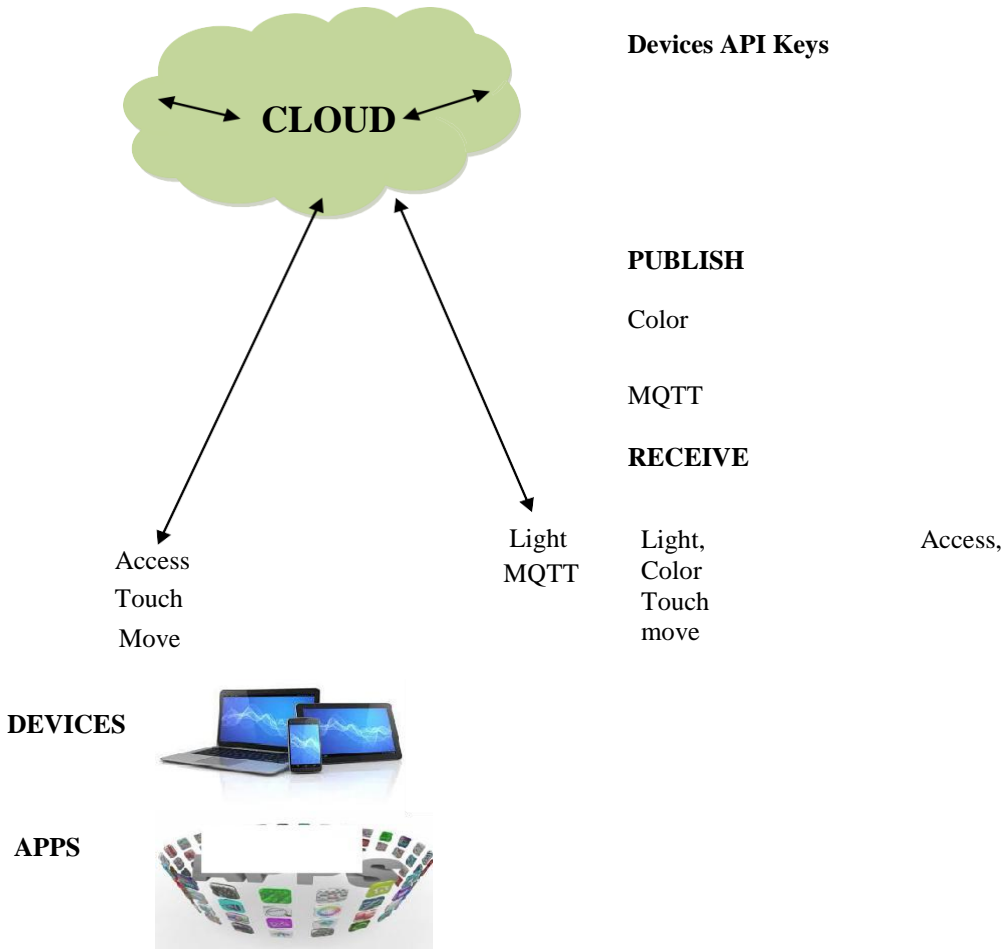


Fig. 1 Architecture for Temperature IoT

Node-red is a simple open source visualization tool that connects devices for the IoT. Node red has been developed in node.js, a server JavaScript widely used in IoT pits and can be run in cloud. Notice that the data collected from these devices are accessed by the satellite which in turn sense these accessed data to the base station. The data sent to the base station is sent in the form of raw data. The cloud filters the raw data and the filtered data can be accessed by the app. Both apps and devices place a very important role in publishing the collected data and to receive the data.

**MQTT**

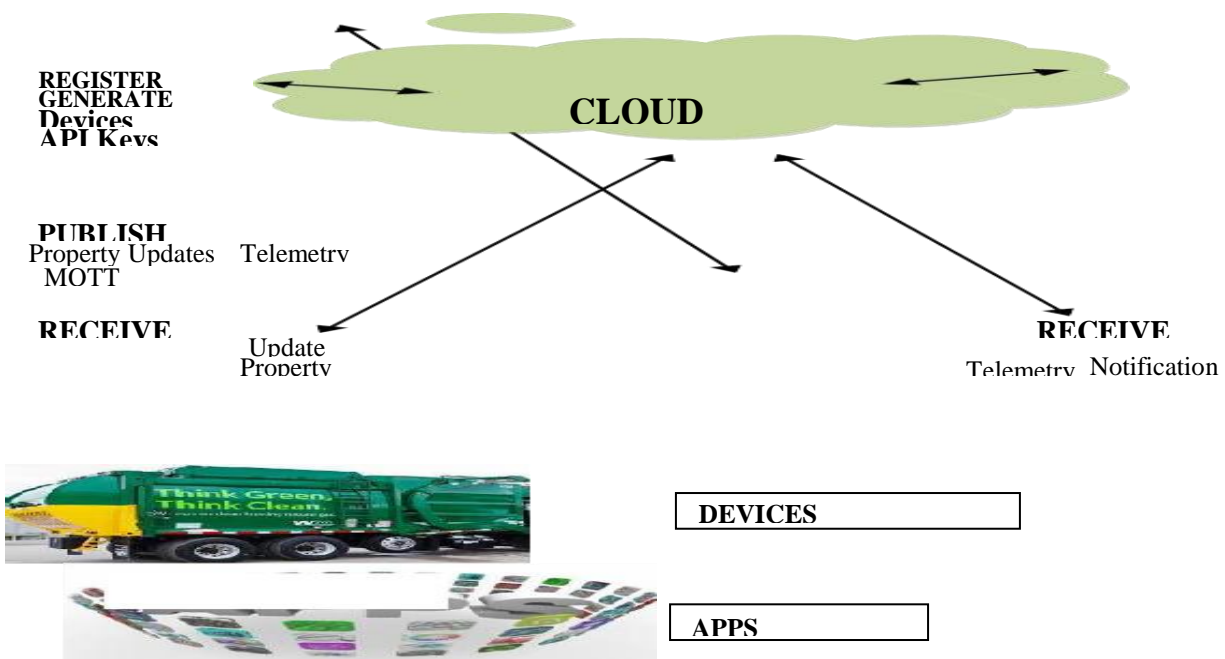


Fig. 2 Architecture for Waste management and vehicle Tracking IoT

#### IV. RESULT

Basically, we have to get connected with the cloud to retrieve the data from the cloud. We can see the login page in Fig. 3, where the user has to log in with the particular API Key and the token which is given by the cloud so that privacy is maintained to access the server.

In Fig. 4 we can see the temperature variation.

We 'll be getting the second to second update of the temperature. And through the graphs and meter we can get to know the variation in temperature. If the temperature is less than 30, the indication will be in green color. If the temperature lies between 31 and 75, we can see that the color changes to yellow and if the temperature is above 75 then the color changes to red.

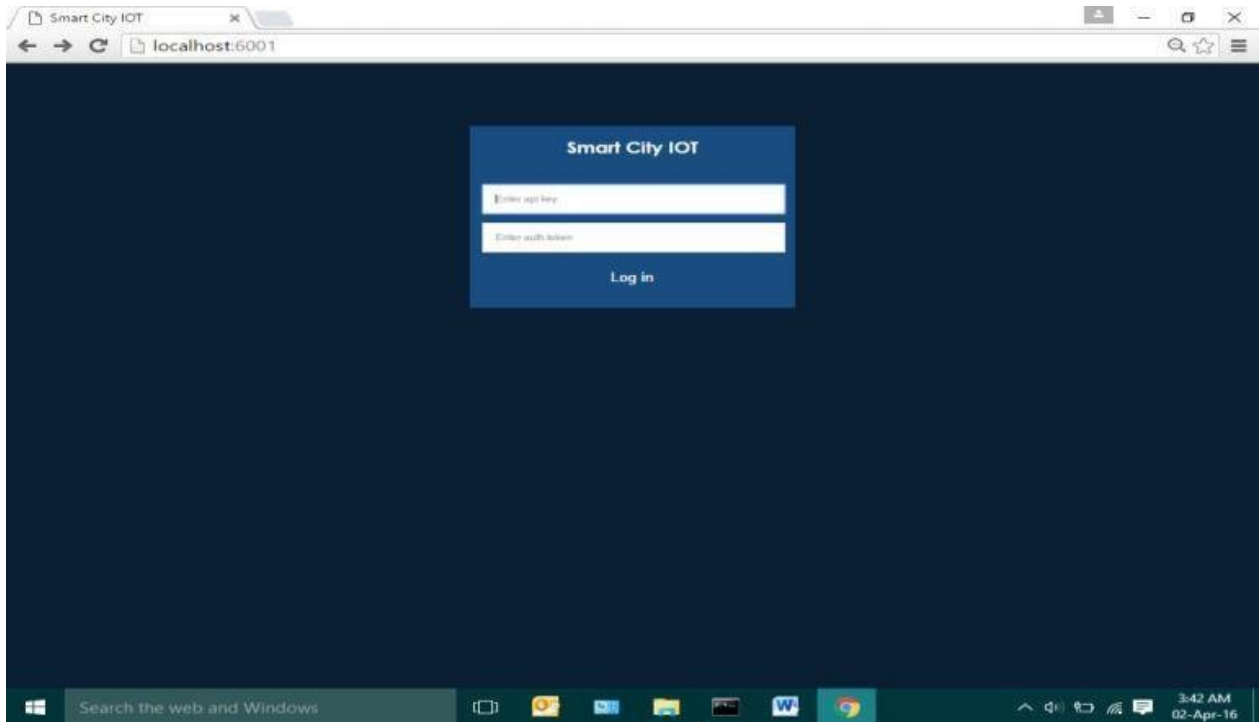


Fig. 3 Login Page

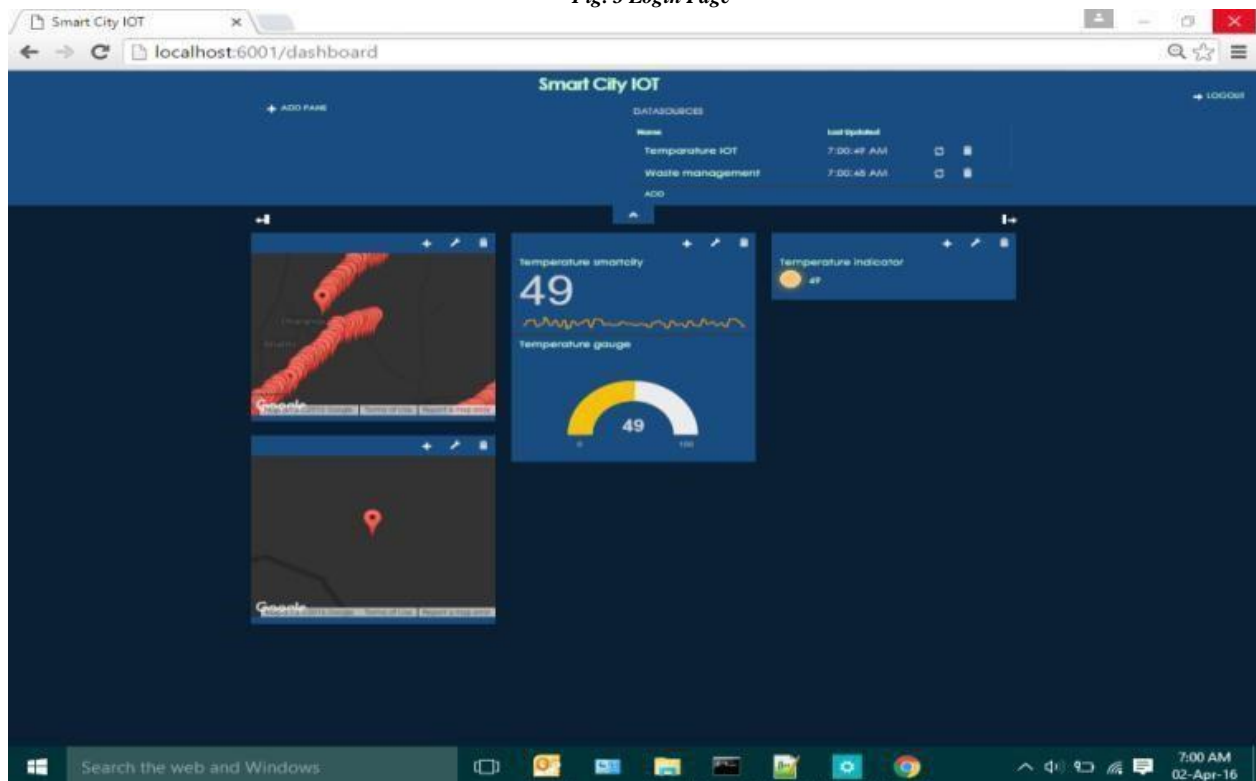


Fig. 4Result of Temperature

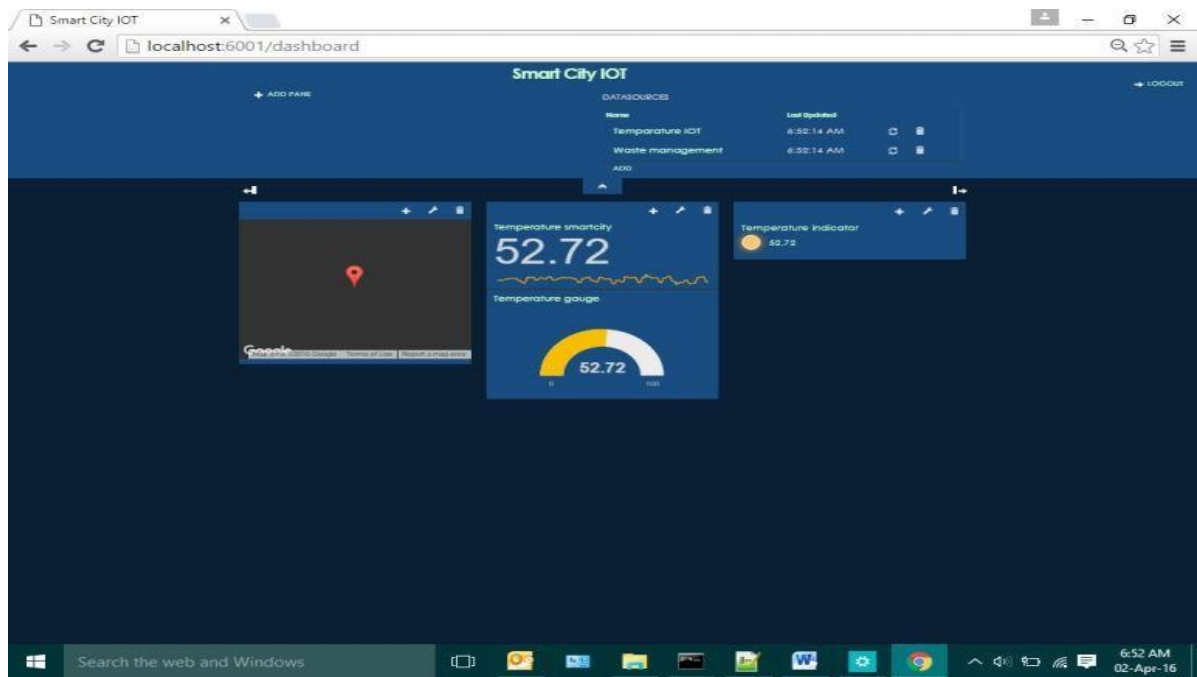


Fig. 5 Overall result of the project

In fig. 5 we can see that we are linking to Google map for tracking the cab of the waste collector. And we can also see that the garbage collector truck has been tracked so that the user will get to know the exact location of the garbage collector truck. Also along with the garbage collector truck, we can see the temperature as well as vehicle tracking in this figure.

#### V. SUMMARY

Start the IoT starter app in the device, and it starts to collect sensor data. From the device, it goes over the MQTT protocol to the IoT cloud and there you can access it via rest API. The data collected are accelerometer data from the device.

#### VI. FUTURE WORKS

We can also implement this in android watches, attached to other IoT concepts like home security, structural health, city energy consumption, smart lighting, and so on.

#### VII. CONCLUSION

In this paper, the notation of environmental monitoring using IoT was proposed to monitor the city from the cost of the damages which may affect the living of the citizens. As a proof of concept, we implemented an IoT of a proposed system. We showed that our system can access the data without any embedded system.

#### VIII. ACKNOWLEDGEMENT

This paper was submitted as a part of the Assignment for the subject of Biology for Mechatronics Engineering.

## References

1. P. Bellavista, G. Cardone, A. Corradi, and L. Foschini, —Convergence of MANET and WSN in IoT urban scenarios, *IEEE Sens. J.*, vol. 13, no. 10, pp. 3558–3567, Oct. 2013.
2. H. Schaffers, N. Kominos, M. Pallot, B.
3. Trousse, M. Nilsson, and A. Oliveira, —Smart cities and the future internet: Towards cooperation frameworks for open innovation, *The Future Internet, Lect. Notes Comput. Sci.*, vol. 6656, pp. 431–446, 2011.
4. D. Cuff, M. Hansen, and J. Kang, —Urban sensing: Out of the woods, *Commun. ACM*, vol. 51, no. 3, pp. 24–33, Mar. 2008.
5. T. Nuortio, J. Kytöjoki, H. Niska, and O. Bräysy, —Improved route planning and scheduling of waste collection and transport, *Expert Syst. Appl.*, vol. 30, no. 2, pp. 223–232, Feb. 2006.
6. W. Kastner, G. Neugschwandner, S.
7. Soucek, and H. M. Newmann, —Communication systems for building automation and control, *in Proc. IEEE*, Jun. 2005, vol. 93, no. 6, pp. 1178–1203.
8. R. T Fielding, —Architectural Styles and the design of network-based software architectures, *(The Representational State Transfer (REST)) Ph.D. dissertation*, pp 76–85, Dept. Inf. Comput. Sci. Univ. California, Irvine, 2000. [Online]. Available: <http://www.ics.uci.edu/~fielding/pubs/dissertation/top.htm>.
9. A. P. Castellani, N. Bui, P. Casari, M. Rossi, Z. Shelby, and M. Zorzi, —Architecture and protocols for the Internet of Things: A case study, *in Proc. 8th IEEE Int. Conf. Pervasive Comput. Commun. Workshops [8](PERCOM Workshops)*, 2010, pp. 678–683.
10. A. P. Castellani, M. Dissegna, N. Bui, and M. Zorzi, —WebIoT: A web application framework for the internet of things, *in Proc. IEEE Wireless Commun. Netw. Conf. Workshops, Paris, France, 2012*.
11. Z. Shelby, K. Hartke, C. Bormann, and B. Frank, Constrained application protocol (CoAP), draft-IETF-core-cap-18 (work in progress), s.l.: IETF 2013. [Online]. Available: <http://tools.ietf.org/html/draft-ietf-core-coap-18>.
12. A. Castellani, S. Loreto, A. Rahman, T. Fossati, and E. Dijk, Best practices for HTTP-CoAP mapping implementation, draft-castellani-core-http-mapping-02 (work in progress), s.l.: IETF 2013. [Online]. Available: <https://tools.ietf.org/html/draft-castellani-core-http-mapping-02>.
13. S. Deering and R. Hinden, Internet Protocol, Version 6 (IPv6) Specification, RFC2460, s.l.: IETF Dec. 1998. [Online]. Available: <https://www.ietf.org/rfc/rfc2460.txt>.
14. G. Montenegro, N. Kushalnagar, J. Hui, and D. Culler, Transmission of IPv6 packets over IEEE 802.15.4 networks, RFC4944, s.l.: IETF Sep. 2007. [Online]. Available: <http://tools.ietf.org/html/rfc4944>.
15. J. Hui and P. Thubert, a Compression format for IPv6 datagrams over IEEE 802.15.4-Based Networks, RFC6282, s.l.: IETF Sep. 2011. [Online]. Available: <http://tools.ietf.org/html/rfc6282>.
16. IEEE Standard for Local and Metropolitan Area Networks—Part 15.4: Low-Rate Wireless Personal Area Networks (LR-WPANs), IEEE Standard 802.15.4-2011.
17. [16] IEEE 802.15 WPAN Task Group 4e(TG4e), IEEE Standard 802.15.4b, 2014.
18. A. P. Castellani, M. Gheda, N. Bui, M. Rossi, and M. Zorzi, —Web services for the Internet of Things through CoAP and EXI, *in Proc. IEEE Int. Conf. Commun. (ICC 2001)*, Kyoto, Japan, 2011.
19. P. Casari et al., —The Wireless Sensor networks for city-Wide Ambient Intelligence (WISE-WAI) project, *MDPI J. Sensors*, vol. 9, no. 6, pp. 4056–4082, Jun. 2009. [Online]. Available: <http://www.mdpi.com/1424-8220/9/6/4056>.